

ISOBOX® Mobil Flex/V 2/16 75

Double-wall insulated transport trolley, closed on all sides, made of aluminium sections on a structural frame made of high-class stainless steel, self-supporting construction.

Double-wall, hinged doors with outside hinges that open 270°, open doors held in position by magnets. Interior consists of two vertical on top of each other compartments. Each compartment holds 8 GN 1/1- containers or trays inserted lengthwise. Side walls include seamless deep-drawn rails with 75 mm. Vertical tray stops made of ø 8 mm stainless steel wire attached to rear of interior spaces to allow air to circulate unhindered.

Four solid polymer corner bumpers on the bottom serve to prevent damage from bumps.

External dimensions ca.:	585 x 799 x 1672
Compartments:	2
Rack unit dimension:	GN 1/1 /530 x 325 mm
Rack unit:	Lengthwise insertion
Support rail pairs:	2 x 8
Height grid:	75 mm
Hinged door(s):	2, door hinge: left
Net weight ca.:	105 kg
Load capacity:	154 kg

Equipped with:

2 swivel castors with locks, 2 fixed castors, plastic, ø125 mm

Box below:

Chiller module 230 V / 0,15 KW cooling capacity

Colour rear and side panels: RAL5015 Sky blue


Colour door panel: RAL5015 Sky blue

Box above:

Heater module 230 V / 0,4 KW

Colour rear and side panels: RAL3020 Traffic red

Colour door panel: RAL3020 Traffic red

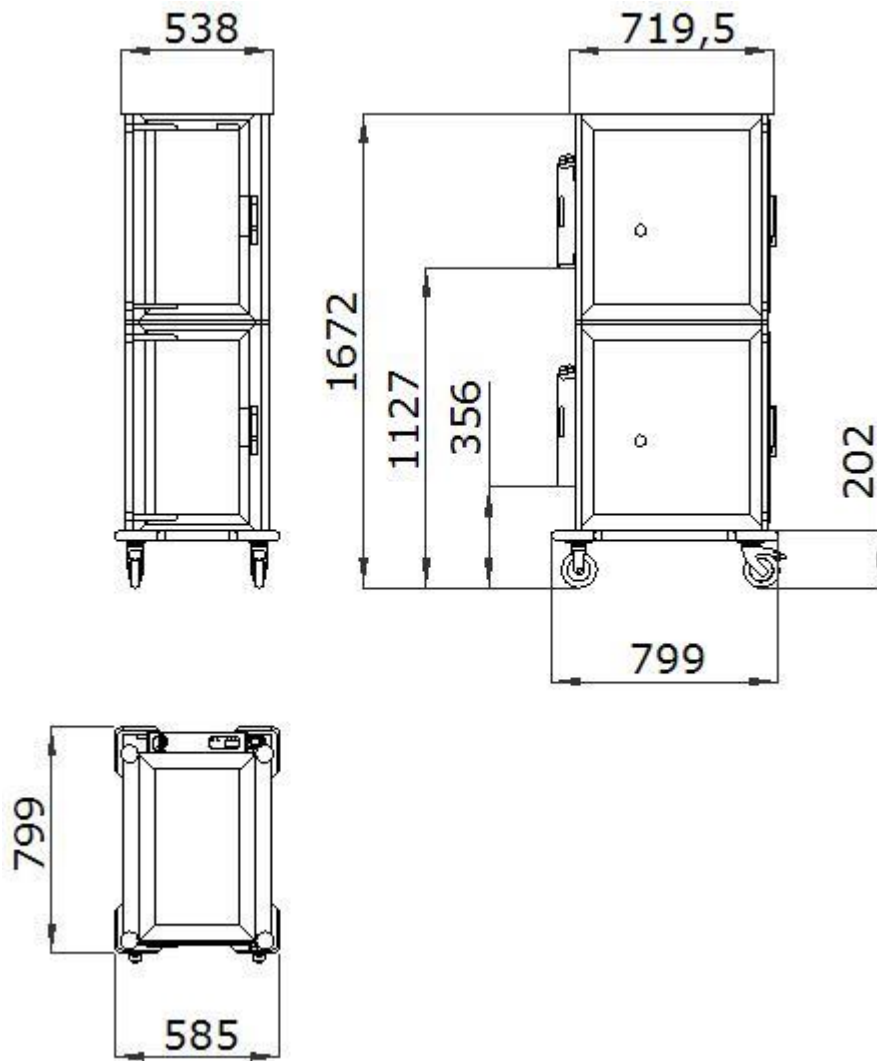

All dimensions are approximate